

# NiCD/NiMH Battery Charger

## CUSTOMISED BATTERY CHARGER FOR POWER TOOL APPLICATION

### OUTLINES

This is a micro-processor controlled rapid battery charger for professional power tools. This product is designed to charge 10 cells in NiCd or NiMH technology.

### FEATURES

- reverse current protection
- battery defect indication
- battery temperature out of range indication
- stand-by operation life: 30.000h min. at 25°C
- closed housing

### SPECIFICATIONS

ENVIRONMENTAL CHARACTERISTICS	
Operation Temperature	0°C - +40°C reliable range
Storage Temperature	-40°C - +70°C
Cooling Condition	Convection cooling
Operation Environment	Professional indoor use
INPUT CHARACTERISTICS (EU)	
Input Voltage (Vin)	Rated: 230 Vac Single Phase Range: 220-240 Vac
Input Frequency	Rated: 50 - 60 Hz Range: 47 - 63 Hz
Input Power	65W max. @max. continuous output power and rated Vin
Standby Power	1W max. @Standby and rated Vin
Efficiency	>80% @ max. output power within rated Vin

### OUTPUT CHARACTERISTICS

Output Voltage	12V
Output Current	3A max.
Max. Cont. output Power	61W

### MECHANICAL CHARACTERISTICS

Dimensions (LxWxH))	150 x 85 x 85 mm
---------------------	------------------


Design and Specifications are subject to change without notice. Ask the factory for technical specifications before purchase and/or use. If there is any doubt regarding the safety of this product, kindly inform us immediately for technical consultation



**POWER**

Electronic Devices Europe GmbH

**SUPPLY**  
Panasonic

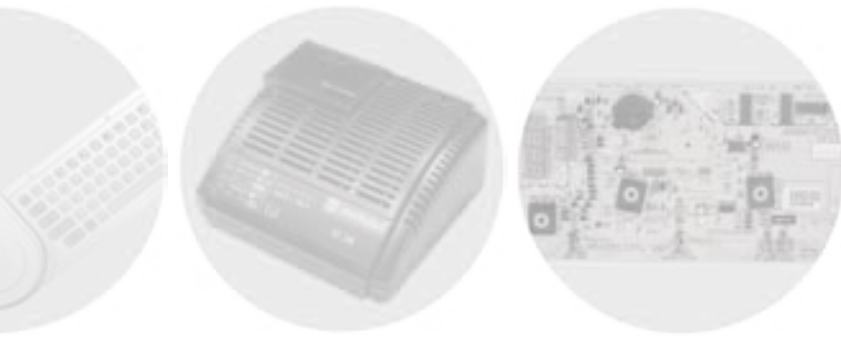

## CONTACT

Dipl.-Ing.  
**Robert Sippel**  
Product Manager  
Power Supply/Control & Drives  
Zeppelinstrasse 19  
21337 Lüneburg, Germany

Tel. (49)-4131-899-312  
Fax (49)-4131-899-187  
Robert.Sippel@eu.panasonic.com